

# INDUSTRIAL TYRES : BIAS

## Y-505

IND-3



The Y-505 is designed specially for reach stackers and container handlers. This tyre provides excellent durability performance with good tread wear resistance and less uneven tread wear.

Use: Container handlers, Forklifts and Reach stackers.

TYRE SIZE	T/T	T/L
12.00-24	20	
14.00-24	28	28

## Y-573

IND-3



The Y-573 is designed specially for towing tractors with regroovable tread.

This tyre provides excellent wear resistance and good traction performance.

Use: Towing tractors

TYRE SIZE	T/T	T/L
17.5-25		36

## Y-553

IND-3



The Y-553 is designed specially for towing tractors with regroovable tread.

This tyre provides excellent wear resistance and good traction performance.

Use: Towing tractors

TYRE SIZE	T/T	T/L
16.00-25		32

## Y-523

IND-4  
DEEP TREAD




This tyre is suited for log stackers and Container handlers with a reinforced bead area and heavy load capacity allowance.

Use: Log stackers, Container handlers and Forklifts

TYRE SIZE	T/T	T/L
16.00-25		36
18.00-25		32, 36, 40
18.00-33		36, 40
24.00-35		42
27.00-49		42
33.00-51		58
36.00-51		58
40.00-57		68, 76

## Y-69

IND-4  
DEEP TREAD

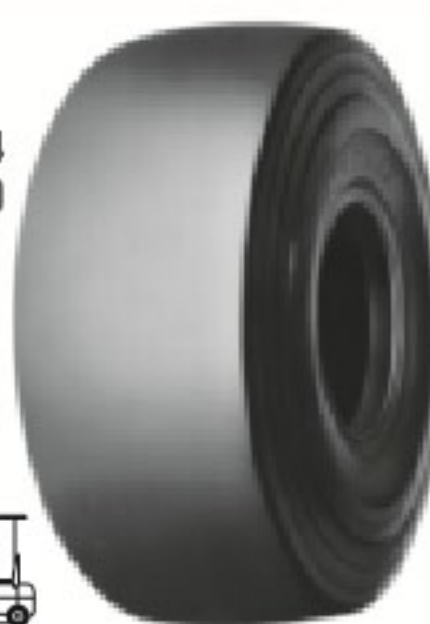

The Y-69 is suited for vehicles such as straddle carriers for container handling and towing tractors used at airports. This tyre has a large tread width and ground contact area for good traction on paved ground surfaces.

Use: Container handlers, Forklifts and Log handlers

TYRE SIZE	T/T	T/L
12.00-24	18, 20	
14.00-24	30	
18.00-25		40
21.00-25		40
18.00-33		40
21.00-35		42

## Y-505

IND-4  
DEEP TREAD



The Y-505 is designed specially for reach stackers and container handlers. This tyre provides excellent durability performance with good tread wear resistance and less uneven tread wear.

Use: Forklifts and Container handlers.

TYRE SIZE	T/T	T/L
18.00-25		40